

# 1    **The Performance of the Autonomous Port of Conakry Based on** 2                                    **Productivity Indicators, 2022.**

3

4

## Abstract

5    This study evaluates the performance of the Port Authority of Conakry (PAC) for the  
6    year 2022 using productivity and operational efficiency indicators. The primary  
7    objective is to measure the efficiency of port operations for eleven types of vessels,  
8    while identifying areas for improvement. The methodology is based on Data  
9    Envelopment Analysis (DEA), applied using Windeap4 and Excel software. Inputs are  
10   classified into two categories: uncontrollable variables (number of ships, physical  
11   characteristics) and controllable variables (dwell time, productivity, berth utilization).  
12   The selected output is port productivity. The results reveal mixed performance:  
13   ferryboats exhibit optimal technical efficiency (100%) but suffer from diseconomies of  
14   scale, while conventional cargo ships and tankers show significant room for  
15   improvement. The total time lost in port operations amounts to 167,571 hours,  
16   reflecting significant inefficiencies. These results highlight the need to optimize port  
17   management in order to improve the PAC's competitiveness at the regional and  
18   international levels.

19   Keywords: port performance, DEA, productivity, efficiency, logistics, Port Authority of  
20   Conakry

## 21   **1. Introduction**

### 22   **1.1 Context**

23   The Autonomous Port of Conakry (PAC) is a strategic driver of Guinea's economy,  
24   accounting for more than 80% of the country's trade [5]. Located on the Atlantic coast,  
25   it serves as the main gateway for the import and export of goods, particularly  
26   essential commodities and mineral resources such as bauxite and gold, which form  
27   the core of Guinea's exports [6].

28   Its role extends beyond national borders: the PAC also serves as a logistics hub for  
29   landlocked neighboring countries, notably Mali, thereby reinforcing its regional  
30   importance in West African economic integration [2].

31   According to the Container Port Performance Index (CPPI 2022) [6] published by the  
32   World Bank and S&P Global Market Intelligence, the PAC ranks first in West Africa,  
33   8th in Africa, and 189th globally out of 348 ports evaluated [7]. This ranking illustrates  
34   the progress made through modernization reforms and improved port management,  
35   but it also highlights persistent challenges related to productivity and operational  
36   efficiency [3].

37 In 2022, port traffic saw significant growth, but this increase was accompanied by  
38 logistical challenges, including congestion and time losses resulting from ships'  
39 prolonged stays in the roadstead and at the docks. These challenges underscore the  
40 need for a rigorous assessment of productivity indicators in order to better  
41 understand the PAC's performance and identify areas for improvement [3].

## 42 **1.2 Issues**

43 Despite being ranked among West Africa's most competitive ports [7], the Port  
44 Authority of Conakry (PAC) continues to face major challenges related to productivity  
45 and logistics management. Recurring congestion issues, slow cargo handling  
46 operations, long vessel turnaround times, and the sometimes inefficient use of port  
47 infrastructure limit its appeal to international shipping companies [6].

48 In 2022, port traffic saw significant growth, but this increase was accompanied by  
49 logistical constraints, notably a total of over 167,000 hours lost—nearly seven  
50 working days—due to prolonged vessel layovers in the roadstead and at the docks  
51 [5]. These losses reflect an operational inefficiency that affects the port's  
52 competitiveness in a regional environment marked by infrastructure modernization in  
53 Dakar, Abidjan, and Lomé.

54 The central question of this study can therefore be formulated as follows:

55 How can the performance of the Port Authority of Conakry in 2022 be measured and  
56 analyzed using productivity indicators, in order to identify the necessary levers for  
57 improvement to enhance its competitiveness within the West African and global port  
58 landscape?

## 59 **1.3 Objectives**

60 The objectives of this study are to assess the effectiveness and efficiency of port  
61 management for the 11 types of vessels that called at the Autonomous Port of  
62 Conakry in 2022, to identify comparable DMUs, and to analyze potential areas for  
63 improvement. The study also aims to compare the results obtained with regional and  
64 international standards in order to propose concrete measures to strengthen the  
65 PAC's competitiveness.

## 66 **2. Methodology**

### 67 **2.1 General Approach**

68 The study is based on the application of the Data Envelopment Analysis (DEA)  
69 method, which measures the relative efficiency of decision-making units (DMUs) by  
70 comparing their inputs and outputs. This approach is particularly well-suited to  
71 evaluating port performance, as it takes into account the diversity of ships and  
72 operations.

### 73 **2.2 Tools Used**

74 • Windeap4 software: for applying the DEA model and calculating efficiency scores.

75 • Excel: for processing raw data, constructing tables, and visualizing results.

### 76 3. Study Population

77 The analysis covers 11 types of vessels that called at the PAC in 2022 (ferries,  
78 conventional cargo ships, tankers, etc.), considered as DMUs (Decision Making  
79 Units).

#### 80 **2.3 Selected Variables**

81 • Inputs: classified into two categories

82 o Indicators that cannot be controlled by the port operator (e.g., number of ships,  
83 port call duration, quay length).

84 o Indicators that can be influenced by managers (e.g., berth utilization, productivity  
85 per berth, occupancy rate).

86 • Output: the PAC's productivity rate in 2022, measured in movements per hour or  
87 tons per day depending on the type of vessel.

#### 88 **2.3 Analysis Procedure**

89 1. Data collection from [5] and institutional sources ([1], [6]).

90 2. Classification of indicators into controllable and uncontrollable inputs.

91 3. Application of the DEA model to calculate:

92 o Pure efficiency (technical efficiency),

93 o Scale efficiency (efficiency related to the size of operations).

94 4. Identification of peer DMUs, i.e., vessels serving as benchmarks for the others.

95 5. Analysis of potential areas for improvement (input savings, size adjustments).

#### 96 **2.4 Methodological Limitations**

97 • The availability and reliability of port data can affect the accuracy of the results.

98 • The diversity of vessel types sometimes makes comparisons difficult.

99 • The choice of a single output metric (productivity rate) limits the scope of the  
100 analysis.

101 The diversity of port logistics often leads us to question how port performance should  
102 be evaluated and makes defining variables complex.

103 Defining variables is no easy task; the output variable is sometimes controversial, as  
104 some researchers believe that relying on a single output can lead to flawed results.

105 In our case, however, we will choose a single output: the productivity of the  
106 Autonomous Port of Conakry.

107 Furthermore, we are interested in the six productivity indicators that we believe can  
108 be manipulated by using a reasoned selection of the ship sample.  
109 We used the following table for the analysis:

UNDER PEER REVIEW IN IJAR

Table 1: AverageIndicators

TYPES OF SHIPS	INPUTS 2022														OUTPUT
	NBER	TOOLS	TE	TBJ	V	L	SQ	SR	SP	T	Pr.Q	SR/SP	TOQ	Attendance	Pr. PORT
ALUMINUM CARRIERS	11.00	9.68	16015.64	39419.16	160.70	88.98	57.08	151.70	20511.74	279.10	0.22	10.19	1.32	219.65	9.68
OTHER BULK CARRIERS	89.00	12.05	29523.11	70218.61	187.94	231.24	74.46	307.66	34467.33	274.15	0.16	224.99	29.20	235.14	12.05
REFRIGERATED CARGO SHIPS	2.00	5.79	2663.00	7457.06	88.29	136.21	0.67	136.88	849.76	8.62	0.01	3.12	0.40	8.53	5.79
CONVENTIONAL CARGO SHIPS	62.00	7.88	12103.39	20601.76	128.08	134.36	77.48	211.84	9934.35	540.47	0.35	95.36	12.37	84.63	7.88
TRAWLERS	527.00	4.18	437.65	1444.64	43.13	28.17	0.50	28.68	150.00	5.85	0.02	169.96	22.06	5.73	4.18
FERRY BOATS	2.00	2.36	74.50	283.57	22.18	333.91	58.38	342.28	0.00	0.00	0.01	7.64	0.99	0.00	2.36
MINERAL CARRIERS	33.00	9.31	16986.58	36932.26	164.06	59.57	42.85	102.42	37701.31	480.86	0.16	22.50	2.92	386.23	9.31
CONTAINER SHIPS	154.00	11.41	27739.10	71699.83	208.88	45.38	21.05	66.54	19302.04	461.88	0.24	79.48	10.31	364.29	11.41
TUGBOATS	2.00	5.50	276.50	1464.77	31.24	56.13	186.67	242.79	12.00	0.29	0.42	1.28	0.17	0.29	5.50
RO-RO SHIPS	48.00	9.46	51221.58	59293.23	197.26	39.27	7.43	46.71	4546.73	136.48	0.13	21.58	2.80	120.15	9.46
TANKERS	102.00	13.52	21674.68	50751.02	166.82	118.70	63.00	180.50	17048.75	366.48	0.33	134.52	17.46	211.41	13.52

KEY TO INPUTS AND OUTPUTS

1- DRAFT: (D) (INPUT)

7- TIME IN PORT: (SP)(INPUT)

13- PORT PRESENCE: PRESENCE (INPUT)

2- GROSS REGISTER TONNAGE: (GRT) (INPUT)

14- NBER: NUMBER (INPUT)

3- VOLUME: (V) (INPUT)

8- TONNAGE (T)(INPUT)

4- LENGTH: (L) (INPUT)

9- QUAY PRODUCTIVITY: (Pr.Q)(INPUT)

5- DOCKING TIME: (SQ) (INPUT)

10- PORT PRODUCTIVITY: (Pr.PORT) (OUTPUT)

6- ANCHORAGE TIME: (SR)

12- DOCK UTILIZATION RATE: (DUR)

### 3. Results

Overall productivity indicators for the Autonomous Port of Conakry in 2022

We will treat the firms, as before, as different types of ships, and thus designate them as follows:

1. Firm 1: Aluminum Carriers;
2. Firm 2: Other Bulk Carriers;
3. Firm 3: Refrigerated Cargo Ships;
4. Firm 4: Conventional Cargo Ships;
5. Firm 5: Trawlers;
6. Firm 6: Ferry Boats;
7. Firm 7: Ore Carriers;
8. Firm 8: Container Ships;
9. Firm 9: Tugs;
10. Firm 10: RO-RO Ships;
11. Firm 11: Tankers.

In this scenario, we will adopt an INPUT approach with variable returns to scale, yielding the following summary of efficiency (or effectiveness):

Summary of efficiencies

Firm crstevrste scale

1	1.000	1.000	1.000	-
2	1.000	1.000	1.000	-
3	1.000	1.000	1.000	-
4	0.622	0.783	0.795	irs
5	1.000	1.000	1.000	-
6	0.000	1.000	0.000	irs
7	1.000	1.000	1.000	-

8	1.000	1.000	1.000	-
9	1.000	1.000	1.000	-
10	1.000	1.000	1.000	-
11	0.753	0.800	0.941	irs
mean	0.852	0.962	0.885	

Note that: mean = average

crste = technical efficiency of CRS DEA

vrste = technical efficiency of VRS DEA

scale = scale efficiency = crste/vrste.

Now, we'll introduce the INPUTS and what they mean.

1. NBER: Number;
2. OUTIL: Unloading equipment;
3. TE: Average draft;
4. TJB: Gross tonnage;
5. V: Average volume in m<sup>3</sup>;
6. L: Average length in meters;
7. SQ: Average time at berth;
8. SR: Average time in roadstead;
9. SP: Average time in port;
10. T: Average tonnage in tons;
11. Prod. Q: Average productivity at berth in tons per hour;
12. SR/SP: The average ratio of time in roadstead to time in port;
13. TOQ: Quay Occupancy Rate in %
14. Presence: Presence in %.

With these INPUTS, we observe that some are not controllable by the port authority and the harbor master's office, whereas others are.

Now, let us examine the situation of each vessel operating under conditions of variable scale efficiency:

### **Conventional cargo ships**

Results for firm : 4

Technical efficiency = 0.783(pure efficiency)

Scale efficiency = 0.795 (irs)(scale efficiency)

Listing of peers:

Peer lambda weight

6	0.069
3	0.394
7	0.183
5	0.070
9	0.257
8	0.028

### Ferry- Boat

Results for firm: 6

Technical efficiency = 1.000

Scale efficiency = 0.000 (irs)

LISTING OF PEERS:

peer lambda weight

6	1.000
---	-------

For ferries, the technical efficiency is 1.00 and the scale efficiency is 0; as we move through the progression, we return to the initial values, which means that for ferries, the margin for improvement is 0.

### Tankers

Given that the types of ships (company) are the same, for an input-oriented analysis with variable returns to scale, we obtain a summary of efficiencies in tanker management Results for firm: 11

Technical efficiency = 0.800 (pure efficiency )

Scale efficiency = 0.941 (irs) (scale efficiency)

Listing of peers :

peer lambda weight

5	0.019
9	0.153
8	0.430
6	0.115
7	0.138
3	0.145

## 4 DISCUSSION

### 4.1 Global situation

On average, ships achieve the following efficiency scores:

- ✓ The average of 0.852, or 85.20%, means that for ships, all inputs can be reduced by  $100 - 85.2 = 14.8\%$  while maintaining the same hourly productivity rate.
- ✓ The average of 0.962 for “vorte” means that better management of ships by their owners can reduce input consumption by  $100 - 96.2 = 3.8\%$  while maintaining the same hourly productivity rate.
- ✓ The average of 0.885 for scale means that by adjusting their sizes, vessel inputs can be reduced by  $100 - 88.5 = 11.5\%$  while maintaining the same hourly productivity rate. Furthermore, it is worth noting that of the 11 types of vessels, eight operate under conditions of constant returns to scale and the other three under conditions of variable returns to scale, which are:

- 1- Conventional cargo ships;
- 2- Ferryboats; and
- 3- Tankers.

These three types of ships in this context operate under conditions of increasing returns to scale (economies of scale).

The other types of ships operate under conditions of constant returns to scale; in other words, these types of ships operate at their optimal size. In this case, we cannot make any improvements since these types of ships are already efficient.

## **4.2 Status by vessel type**

### **4.2.1 Conventional cargo ships**

The pure efficiency of managing conventional cargo ships at the Port of Conakry is 79.5%, which indicates that if the management of this type of vessel is improved, 21.7% ( $100 - 78.3$ ) of inputs could be saved.

Since the scale efficiency is 78.3%, by adjusting the size of conventional cargo ships, input consumption could be reduced by 20.5% ( $100 - 79.5$ ).

To summarize the projections, we find that:

Inputs 4, 6, and 11 each have zero movement slack; therefore, for these inputs, only a single reduction of the original values (radial movement) is required. However, inputs 1, 2, 3, 5, 9, 10, 12, 13, and 14 require an additional reduction (movement slack).

These various reductions are implemented to ensure that the management of conventional cargo ships at the Autonomous Port of Conakry is efficient and achieves the same hourly productivity rate.

To improve performance, managers of conventional cargo ships at the Port of Conakry will need to analyze ship management:

- 1- Refrigerated cargo ship with a score of: 0.394;
- 2-Trawler with a score of: 0.070;
- 3- Ferry with a score of: 0.069;
- 4- Bulk carrier with a score of: 0.183;
- 5- Container ship with a score of: 0.028;
- 6- Tugboat with a score of: 0.257.

At this stage, with these different types of ships selected, it will be important to choose the management strategy for the ship type with the highest score.

To use this score, one must select a hypothetical ship type for which the management strategy should incorporate 39.4% of the refrigerated cargo ship management method.

Using pure efficiency and economies of scale, the following table shows the original value, the projected value, and the balance for each input:

Table 2: Comparison of Scores for Conventional Cargo Ships

INPUTS	NBER 1	OUT 2	TE 3	TJB 4	V 5	L 6	SQ 7	SR 8	SP 9	T 10	Pr. Q 11	SR/SP 12	TOQ 13	<sup>14</sup> ATTENDANCE
ORIGINAL VALUE (OV)	62	12	7.88	12103.39	20601.76	128.08	134.36	77.48	211.84	9934.35	540.47	0.35	95.36	12.37
PROJECTED VALUE (PV)	48.534	6.955	6.168	5039.657	12199.67	83.184	105.18	60.651	162.39	7776.63	104.705	0.15	20.278	2.631
BALANCE(OV-PV)	13.466	5.045	1.712	7063.733	8402.089	44.896	29.183	16.829	49.452	2157.72	435.765	0.2	75.082	9.739

Table 2 shows the projections that provide the accurate figures that could have been used to achieve the 84.63 tons/hour productivity rate for conventional cargo ships at the Port of Conakry.

For example:


- 6.955 RTGs would have been sufficient instead of 12 to achieve this hourly productivity rate;
- 105.177 hours of berthing time would have been sufficient instead of 134.36 hours;
- 60.651 hours of anchorage time would have been sufficient instead of 77.88 hours;
- 162,388 hours spent in port would have been sufficient instead of 211.84 hours;
- 20.278% of TOQ would have been sufficient instead of 95.36%;
- A presence of 2.631% would have been sufficient instead of 12.37%.

The total time lost due to stays in the roadstead, at the docks, and in the port would be 95.864 hours, which is not insignificant since it corresponds to roughly 4 lost workdays.

Using the following graph, we will visualize the overall situation regarding the management of conventional cargo ships at the Autonomous Port of Conakry:

Figure 1: (Input comparisons for conventional cargo ships)

## COMPARISON OF THE 2022 MAINSTREAM CANDIDATES' SCORES

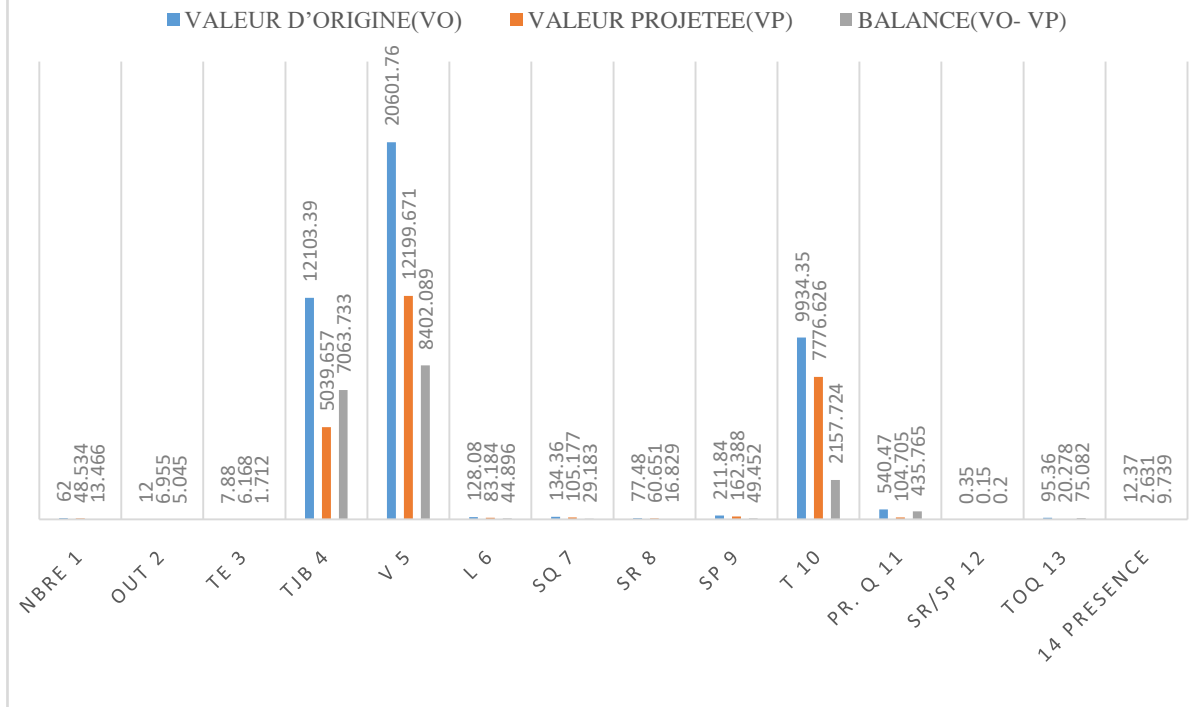

UNDER PEER REVIEW

#### 4.2.2 Ferry- Boat

For ferries, the technical efficiency is 1.00 and the scale efficiency is 0; as we move through the progression, we return to the initial values, which means that for ferries, the margin for improvement is 0.

#### 4.2.3 Tankers

The pure efficiency of tanker management at the Autonomous Port of Conakry is 80%, which indicates that if tanker management at the Autonomous Port of Conakry is improved, 20% = (100 – 80)% of inputs could be saved.

Since the scale efficiency value is 94.1%, by adjusting the size of the tankers, input consumption could be reduced by 5.9% = (100 - 94.1)%.

To summarize the projections:

Inputs 1, 6, 7, 8, and 10 each have zero movement slack; therefore, for these inputs, a single reduction of the original values (radial movement) is required. However, for inputs 2, 3, 4, 5, 9, 10, 11, 12, 13, and 14, an additional reduction is mandatory (movement slack).

These various reductions are implemented to achieve efficient management of tankers at the Autonomous Port of Conakry.

To improve performance, tanker managers at the Autonomous Port of Conakry will need to analyze the management of the following types of ships:

- 1- Refrigerated cargo ship with a score of: 0.145;
- 2- Trawler with a score of: 0.019;
- 3- Ferry with a score of: 0.115;
- 4- Ore carrier with a score of: 0.138;
- 5- Container ship with a score of: 0.430;
- 6- Tugboat with a score of: 0.153.

At this stage, given the different types of ships selected, it will be important to choose the management approach for the ship type with the highest score, which is the container ship.

To use this score, we must select a hypothetical ship type for which we must adopt 43% of the container ship management method.

Using pure efficiency and economies of scale, the following table shows the original value, the projected value, and the balance for each input:

Table 3: Comparison of Scores for the Tankers

INPUTS	NBRE 1	OUT 2	TE 3	TJB 4	V 5	L 6	SQ 7	SR 8	SP 9	T 10	Pr. Q 11	SR/SP 12	TOQ 13	PRESENCE
ORIGINAL VALUE (OV)	102	10	13.52	21674.7	50751.02	166.82	118.7	63	180,5	17048.8	366.48	0.33	134.52	17.46
PROJECTED VALUE (PV)	81.585	7.854	8.225	14721.3	37302.511	133.431	94.942	50.391	139.637	13636.5	266.468	0.193	42.031	5.452
BALANCE=OV-PV	20.415	2.146	5.295	6953.43	13448.509	33.389	23.758	12.609	40.863	3412.27	100.012	0.137	92.489	12.008


Table 3 shows the projections calculated using this method, which provide the accurate figures that could have been used to achieve the tankers' productivity rate of 211,410 tons per hour at the Port Autonome de Conakry.

For example:

- 7,854 oil tankers would have been sufficient instead of 10 to achieve this productivity rate of 211,410 tons per hour;
- 94,942 hours of berthing time would have been sufficient instead of 118.7 hours;
- 50,391 hours of anchorage time would have sufficed instead of 63 hours;
- 139,637 hours of port time would have sufficed instead of 180.50 hours;
- 42.031% of TOQ would have sufficed instead of 134.52%;
- A presence of 5.452% would have been sufficient instead of 17.46%.

The total time lost due to stays in the roadstead, at the docks, and in port would be 77.23 hours, which is enormous, as it corresponds to more than three lost workdays.

Figure 2: (Comparison of inputs for tankers)

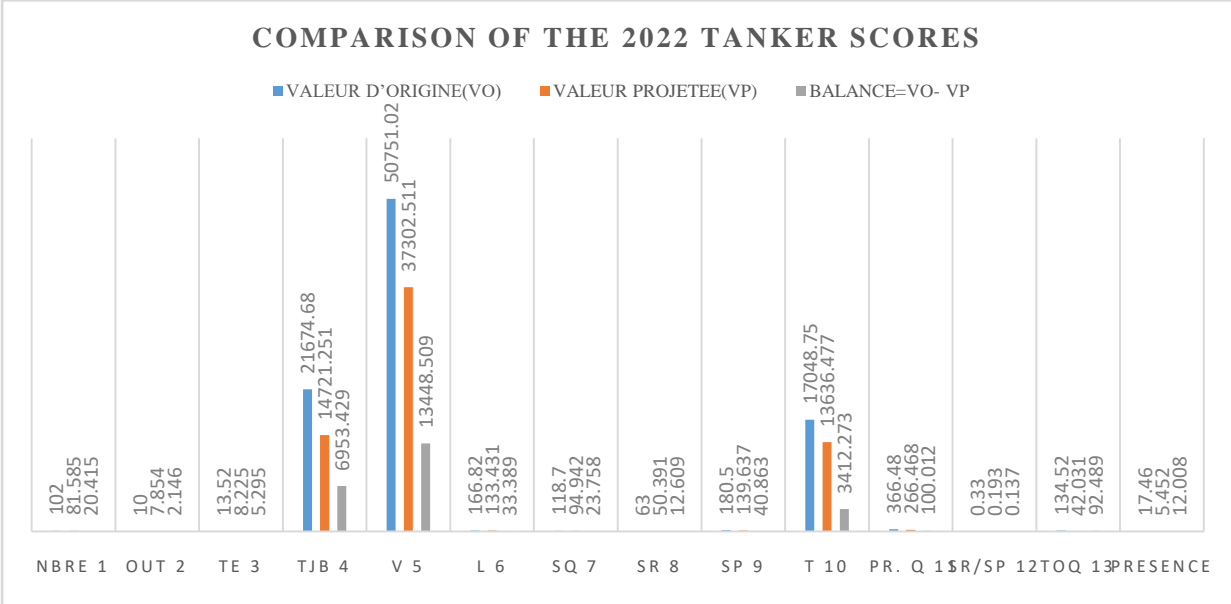

### 4.3 Comparison with regional and international standards

#### 4.3.1 PAC Results for 2022

- Ferry: pure efficiency 100%, scale efficiency 0%.
- Conventional cargo ships: pure efficiency 78.3%, scale efficiency 79.5%.

- Tankers: pure efficiency 80%, scale efficiency 94.1%.
- Total time lost: 167,571 hours ( $\approx$  7 business days).

### 4.3.2 Regional Standards (West Africa)

The ports of Dakar (Senegal) and Abidjan (Ivory Coast) generally achieve efficiencies of over 85% for conventional cargo ships and tankers, thanks to modernized infrastructure and improved logistics management [6] (UNCTAD, 2022).

- The average turnaround time in these ports is less than 48 hours, compared to longer durations observed in Conakry.
- Although PAC is making progress, it remains below these standards for conventional cargo ships, with an estimated margin for improvement of 20–22%.

### 4.3.3 International standards

According to the Container Port Performance Index [7] (World Bank & S&P Global, 2023), Asian ports such as Shanghai and Singapore achieve efficiencies of nearly 95–100%, with turnaround times reduced to less than 24 hours.

- European ports (Rotterdam, Hamburg) also maintain efficiency rates above 90%, thanks to the digitization and automation of operations.
- Compared to these standards, the PAC shows mixed performance: excellent efficiency for ferries (100%), but still limited efficiency for conventional cargo ships and tankers.

### 4.3.4 Comparative analysis

- Strengths of the PAC: maximum efficiency for ferry boats, significant improvement in tankers (94.1% economies of scale).
- Weaknesses: management of conventional cargo ships, long dwell times, cumulative losses of over 167,000 hours.
- Deviation from standards: approximately 10–15% behind high-performing regional ports (Dakar, Abidjan) and 15–20% behind international standards.

### 4.3.5 Limitations of the study

Despite the scientific and practical value of this research, certain limitations should be noted:

#### 1. Data availability and reliability

- The port statistics used are primarily derived from official PAC reports for the year 2022.
- Some data may be incomplete or subject to biases related to collection methods.

→The comparison with regional and international standards is based on databases [1], [6] that do not always cover the same variables or time periods.

## 2. Specific characteristics of vessel types

→ The assessment covered 11 types of vessels, each with distinct operational characteristics (ferries, conventional cargo ships, tankers, etc.).

→ This diversity sometimes makes it difficult to harmonize indicators and make direct comparisons between categories.

→ Efficiency results (DEA) must therefore be interpreted with these specific characteristics in mind.

## 3. DEA Methodology

→The Data Envelopment Analysis (DEA) method is sensitive to the choice of inputs and outputs.

→The results depend heavily on the classification of indicators as “manipulable” and “non-manipulable.”

→ Using a single output (productivity rate) can limit the scope of the analysis.

## 3. External factors not taken into account

→ Economic, political, and climatic conditions in 2022 may have influenced port performance.

→ These external variables were not included in the model, which may limit the generalizability of the results.

## 5. Conclusion

The assessment of port efficiency at the Port Autonome de Conakry in 2022 highlights significant room for improvement, particularly for conventional cargo ships and tankers. For the former, a pure efficiency of 78.3% and a scale efficiency of 79.5% indicate that adjustments in management and scale could reduce input consumption by nearly 20 to 22%, while achieving optimal productivity of 84.63 tons/hour. Tankers show similar results, with a potential productivity of 211,410 tons/hour and a reduction in resources used of over 15%.

Analysis of dwell times reveals a total of 167,571 hours lost—equivalent to approximately 7 unused working days—as well as a Berth Utilization Rate (BUR) significantly higher than actual needs. These inefficiencies point to considerable potential for streamlining port operations.

In summary, the DEA method demonstrates that optimizing management and adjusting vessel capacities are essential levers for strengthening the PAC's competitiveness and sustainably improving its logistics performance.

Furthermore,

- The PAC exhibits varying performance levels depending on vessel type.
- The identified areas for improvement (conventional cargo ships, tankers) are crucial for enhancing competitiveness.
- DEA proves to be a relevant tool for assessing port efficiency and guiding strategic decisions.

## **6. Perspectives**

An analysis of the productivity indicators for the Autonomous Port of Conakry for the year 2022 reveals significant room for improvement, particularly for conventional cargo ships and tankers. To enhance the PAC's competitiveness and bring it in line with regional and international standards, several approaches can be considered:

### **1. Modernization of port infrastructure**

- Expansion and renovation of docks to accommodate a larger number of ships.
- Acquisition of new cargo-handling equipment (gantry cranes, modern cranes).
- Improvement of storage areas to reduce the stock-to-space ratio and optimize space utilization.

### **2. Digitization of procedures**

- Implementation of computerized systems for managing cargo flows and port operations.
- Adoption of digital platforms for real-time tracking of ships, containers, and logistics operations.
- Reduction of administrative delays through the digitization of customs and port formalities.

### **3. Optimization of cargo flow management**

- Reorganization of cargo handling operations to reduce vessel turnaround times.
- Implementation of dynamic planning strategies to limit congestion and time losses (167,571 hours in 2022).
- Development of regional partnerships to streamline trade and strengthen logistics integration.

### **4. Strengthening human capacity**

- Ongoing training for port managers and operators in new technologies.

-Development of a culture of performance and efficiency among staff.

## 7. References

1. Banque mondiale (2023). *Rapport sur la performance portuaire en Afrique de l'Ouest*. Washington, DC : Banque mondiale.
2. Banque mondiale & S&P Global Market Intelligence (2023). *Container Port Performance Index 2022*. Washington, DC : Banque mondiale.
3. Guineematin (2023). *Le Port Autonome de Conakry : progrès et défis persistants*. Conakry : Guineematin.com.
4. Guineecheck (2023). *Analyse critique de la productivité portuaire au PAC*. Conakry : Guineecheck.org.
5. Port Autonome de Conakry (PAC) (2022). *Rapport annuel 2022*. Conakry : Direction générale du PAC.à
6. UNCTAD (2022). *Port Performance Indicators*. Genève : Nations Unies, Conférence sur le commerce et le développement.
7. Banque mondiale & S&P Global Market Intelligence (2023). *Container Port Performance Index 2022*. Washington, DC : Banque mondiale.